


Type 58 CT / Workover BOP

AXON's Type 58 Coiled Tubing/Workover BOPs are designed to seal and snub pipe, tubing, coiled tubing, and wireline during well service operations. Hydraulically actuated, these BOPs can also be fitted with hydraulic locks for use in subsea applications. Manual locking screws are also available for standard surface operation.

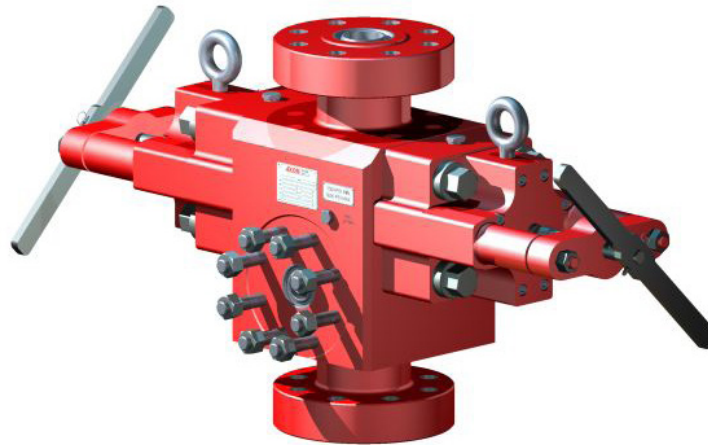

FEATURES / BENEFITS

Wide Variety of Rams Available

- Blind rams
- Coiled tubing & pipe rams
- Shear rams
- Wireline rams
- Slip rams

Design Specifications

- Designed and manufactured to ISO 13533 (API 16A) for drill-through equipment
- Designed as standard to ISO 15156-1 (NACE MR-0175) for use in hydrogen sulfide environments
- Available in single and multiple solid block body configurations
- Allows for quick and reliable hydraulic ram change operation
- Flanged, studded or quick union top and bottom connections
- Studded or flanged side outlets for equalization, bleed off, shut in flow, reverse circulation are available
- Manual locking stem can be used to close the BOP and lock in the rams for long shut-in periods
- Hydraulic ram locking devices available

Type 58 Coiled Tubing / Workover BOP

SPECIFICATIONS

General Type 58 CT / Workover BOP Overview

- Bore sizes from 2-9/16" to 7-1/16"
- Pressure ranges up to 20,000 psi
- For use with tubing or casing up to 5-1/2" outside diameter

Detailed Type 58 CT / Workover BOP Chart

RISER BORE	BOP TYPE	WORKING PRESSURE	STANDARD CONNECTION	SIDE OUTLET	MAX PACKOFF
2-9/16"	Single	20,000 psi	2-9/16" - 6 BX 20,000 psi W.P. Flange	2-1/16" - 6 BX 20,000 psi W.P. Flange	1.9" OD
3-1/16"	Single	20,000 psi	3-1/16" - 6 BX 20,000 psi W.P. Flange	2-1/16" - 6 BX 20,000 psi W.P. Flange	2-3/8" OD Tubing
4-1/16"	Single	15,000 psi	4-1/16" - 6 BX 15,000 psi W.P. Flange	2-1/16" - 6 BX 15,000 psi W.P. Flange	2-7/8" OD
4-1/16"	Twin	15,000 psi	4-1/16" - 6 BX 15,000 psi W.P. Flange	2-1/16" - 6 BX 15,000 psi W.P. Flange	2-7/8" OD
4-1/16"	Single	20,000 psi	4-1/16" - 6 BX 20,000 psi W.P. Flange	2-1/16" - 6 BX 20,000 psi W.P. Flange	2-7/8" OD
7-1/16"	Single	10,000 psi	7-1/16" - 6 BX 10,000 psi W.P. Flange	2-1/16" - 6 BX 10,000 psi W.P. Flange	5-1/2" OD
7-1/16"	Twin	10,000 psi	7-1/16" - 6 BX 10,000 psi W.P. Flange	2-1/16" - 6 BX 10,000 psi W.P. Flange	5-1/2" OD

* Type 58 can also be customized to customer requirements

* Specifications subject to change without notice